



- ▶ **Most Consistent & Efficient Seal Across Varying Trailer Heights**
- ▶ **Sealing Efficiency Protects Personnel & Property**
- ▶ **Increases Loading Dock Safety While Improving Comfort & Productivity**
- ▶ **Available as a Single Unit with “L” Style Side Pads or Header Retrofits Existing Installed Seals & Shelters**
- ▶ **Unique Patented Head Pivot Assembly Provides Automatic Positioning & Tension for a Tight Seal**
- ▶ **Tightly Seals the Entire Width of the Trailer Roof, Blocks Water & Gives Access to Full Trailer Height**
- ▶ **Yellow Guide Stripes on the “L” Pad Assist the Driver in Positioning the Trailer**
- ▶ **Bottom Filler Panel at Each “L” Pad Aids in Preventing Air Flow into the Loading Dock Area**
- ▶ **Rough Flex™ Base Fabric with Superior Performance Max Flex™ Reinforcement on Header & “L” Pads Provide Maximum Durability**

Specifications

Specifications: Dock seal/shelter shall be Series TC _____ as provided by W.B. McGuire™ Company. Each unit shall be designed to accommodate an opening size up to _____ wide x _____ high; having a _____" dock height; equipped with _____" projection dock bumpers. Unit shall be designed to service vehicles ranging in height from _____ to _____. Each unit shall be constructed of (2) side pads of an "L" style design and (1) head frame assembly with a spring bias head pad system having the following O.D. dimensions: 11'-2" wide x 11'-0" high x 16" projection.

The head and side pads shall be constructed having a Rough Flex™ base material; with the entire contact face of both side and head pads further reinforced with superior performance Max Flex™ material.

Head frames shall be constructed of structural steel tubing having all welded joints with translucent fiberglass secured to the exterior.

Each unit shall include one pair of self positioning, independent panels equipped with Durapleat® pleats designed to close the transition gap between the face of the head and side pads, while providing additional reinforcement to this area.

Head pad pivot mechanism will provide positioning and tensioning for the head member to create a weather tight seal at the top of the vehicle. Head member projects beyond the side pads. Each unit shall include a front and rear head curtain to conceal and protect the head pad pivot assembly from the elements. All hardware shall be galvanized steel.


Options

Base Fabric: reinforcement • Rough Flex™ with Max Flex™ on header and L-pads

Options: • Head Pad assembly for use with existing seals or shelters
• Additional projections
• Tapered units



Weather Sentry™ head member shown is installed over an existing seal.

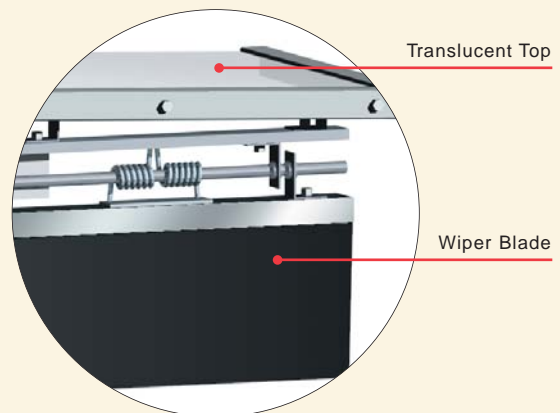

W.B. McGuire™ Company
205 Broadview Street
P.O. Box 151
Upper Sandusky, OH 43351
Phone 1.800.262.1188
Fax 419.294.4980
www.wbmcguire.com