


# SPECIFICATIONS - SAFETY BARRIER

McGuire model B-2-B, Bar Lift Barrier is capable of withstanding a 5 ton impact at 4 miles per hour. Hydraulic activation by push button control will raise the barrier to allow loading/unloading. After loading/unloading is complete, push button control allows barrier to be lowered to its normal safe position. A yellow light will illuminate when ever the barrier is in transition from either its horizontal or vertical position. The barrier is equipped with deadman control which eliminates movement when the raise/lower push button is released. A 115/1/60, 1-1/2 HP power pack with push button control is standard. As an option, the unit may be 3 phase power and/or interlocked with any McGuire hydraulic dock leveler.

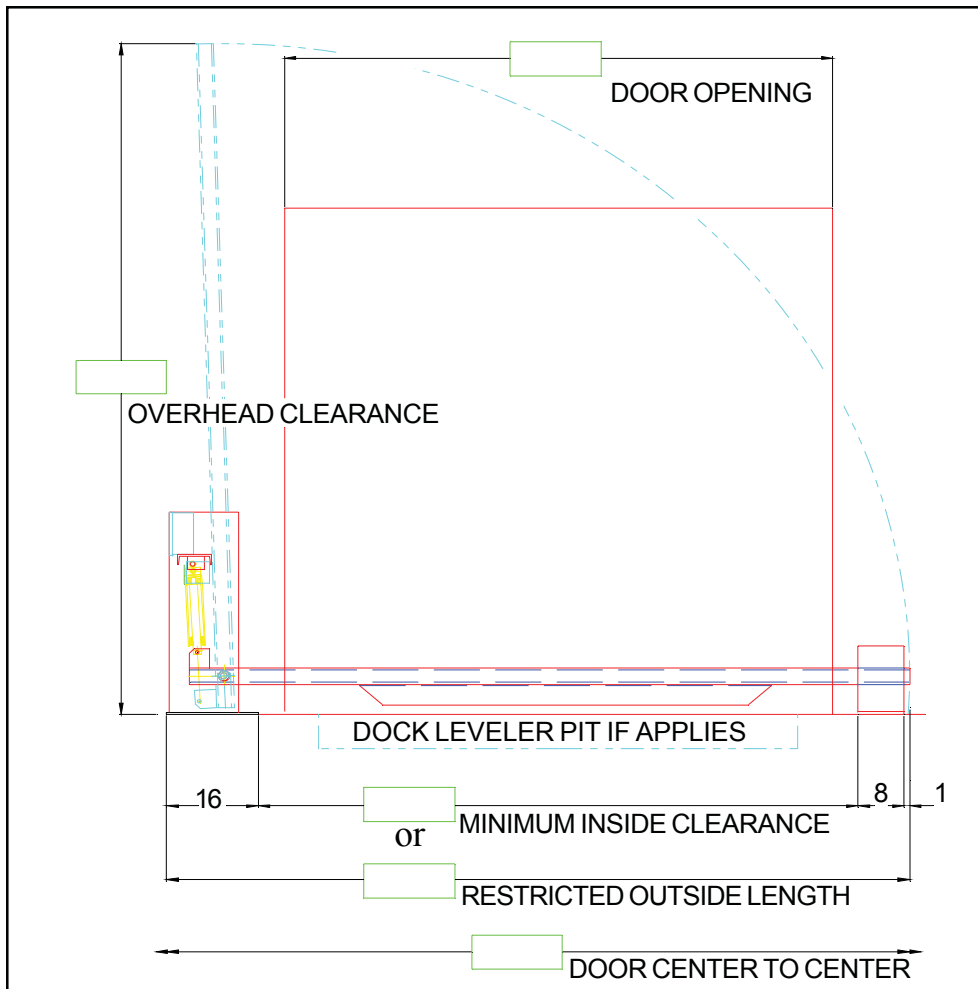

## PRODUCT REQUIREMENTS

- |   |   |
|---|---|
| <input type="checkbox"/> SINGLE PHASE       | <input type="checkbox"/> OPTIONAL UNDER-RIDE GUARD        |
| <input type="checkbox"/> 120 VOLT 60 HZ     |   |
| <input type="checkbox"/> 240 VOLT 60 HZ     | <input type="checkbox"/> SPECIAL MECHANICAL (PAINT, ETC.) |
| <input type="checkbox"/> THREE PHASE        | _____   |
| <input type="checkbox"/> 240 VOLT 60 HZ     | _____   |
| <input type="checkbox"/> 480 VOLT 60 HZ     | _____   |
| <input type="checkbox"/> SPECIAL ELECTRICAL | _____   |
| _____                                       | _____   |
| _____                                       | _____   |