



SERIES TS103:

FOAM DOCK SEAL WITH CURTAIN HEAD

LOADING DOCK SEALS & SHELTERS




- ▶ Head Curtain Accommodates Differing Trailer Heights
- ▶ Top of Unit is Sloped Forward to Promote Water Drainage & Supported by Wood 2"x 4" at Wall
- ▶ Tapered Top is Supported at Front by Tubular Metal Support Inside Curtain
- ▶ Full Length Yellow Guide Stripes to Assist Drivers Positioning of Trailers
- ▶ All Pads Are Vented for Air Release When Compressed
- ▶ Highly Resilient, Endurance Tested Foam
- ▶ Foam is Chemically Welded to Kiln Dried Pressure Treated Lumber
- ▶ Wide Selection of Highly Durable Fabrics & Wear Surfaces to Maximize Durability
- ▶ Intermediate Fiberglass Stays in Curtain Add Stiffness to Aid in Prevention of Sagging

SPECIFICATIONS

Specifications: Dock Seals shall be model TS _____ as provided by McGuire® to fit a door opening _____ wide x _____ high. Side pads shall enclose a polyurethane foam pad, which is to be chemically welded to a 2" thick, pressure treated wood frame, kiln dried before and after treating. (Steel frame is optional.) The cover shall wrap behind the wood weather-tight construction. Adequate air exhausts and drain holes are to be provided in covers, and both shall be designed to prohibit moisture infiltration. Side pads shall include full length, highly visible guide stripes. Mounting hardware shall be galvanized steel.

Standard unit shall consist of two side pads that mount vertically along both sides of the door opening. The head curtain shall be secured at the building face by the means of a pressure treated, kiln dried before and after treating, 2"x4" wood head frame, which shall be mounted over the top of the side pads with the head curtain tapering away to provide for adequate drainage. Unit shall include intermediate "Scotchply®" stays, a front tubular metal support and tension straps to keep head curtain taut. The support tubing shall be held in place by a fabric sleeve sewn into the head curtain. Various pad widths, projections, tapers and bevel shapes are available.

Options	
Basic Fabric: (in a variety of colors)	▶ Truk Flex™ (heavy usage)
	▶ Rough Flex™ (medium usage)
	▶ 22 oz Vinyl (medium usage)
	▶ 40 oz Vinyl (medium/heavy usage)
Durapleat®	▶ 4" exposure
	▶ 8" exposure
	▶ 16" exposure
	▶ Beveled side and/or head pads
	▶ Tapered side pads
	▶ Additional projections beyond 10" standard - Drop curtains for fixed head pads
	▶ Split curtains with rope and pulley

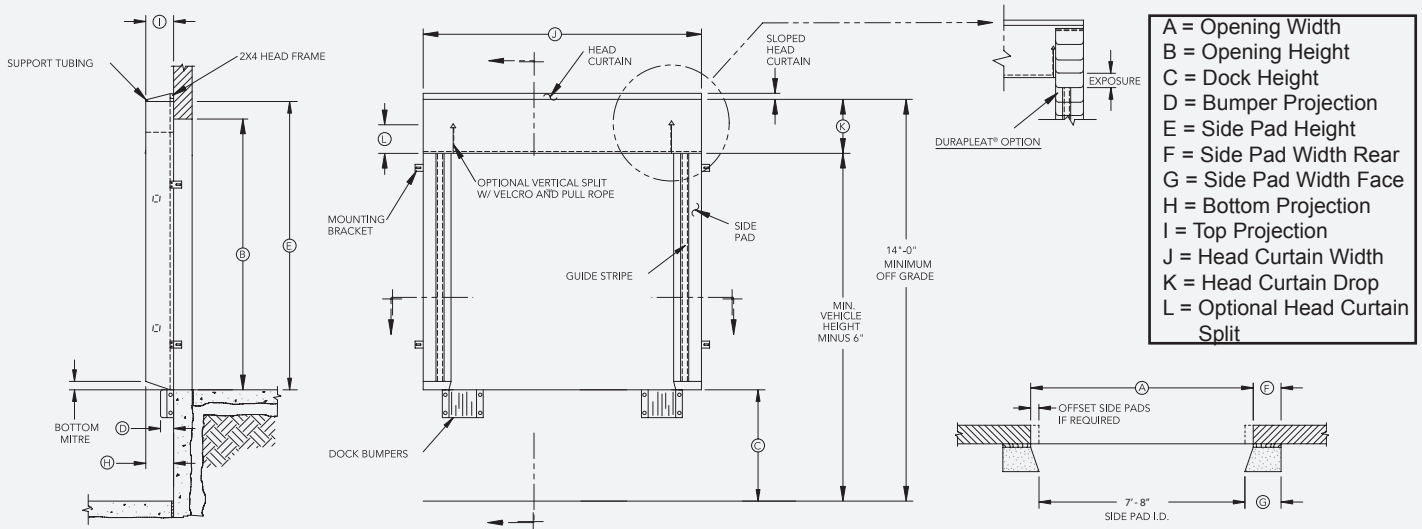

205 Broadview Street • Upper Sandusky, OH 43351
Phone: 1.800.262.1188 • Email: sales@wbmcguire.com
www.wbmcguire.com

DISTRIBUTED BY: